



Rotary dimmer in E-Design flat without N connection

DTD65FL-230V-wg

**Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!**

Temperature at mounting location: -20°C up to +50°C.

Storage temperature: -25°C up to +70°C.  
Relative humidity: annual average value <75%.

Rotary dimmer flat without N connection for single mounting 84x84x21 mm or mounting into the E-design switching system. Installation depth 33 mm. Universal dimmer switch with rotary knob, Power MOSFET up to 200W. With adjustable minimum and maximum brightness. Standby loss 0.5 watt only.

Universal dimmer switch for R and C loads up to 200 watt, depending on ventilation conditions.

Dimmable energy saving lamps ESL and 230V LED lamps in 'trailing edge' mode up to 200W or up to 40W in 'leading edge' mode, depending on ventilation conditions.

If 230V LED lamps are lightly glowing when they are turned off, a GLE base load must be installed parallel to the lamp.

**It is not permitted to connect L loads (inductive loads, like wounded transformers).**

**Zero passage switching with soft start and soft OFF to protect lamps.**

Control voltage, supply voltage and switching voltage 230V. Minimum load 4 W.

In case of a power failure the switching position and the brightness level are stored. If applicable the dimmer will be switched on at the stored brightness level after the supply voltage is recovered.

Automatic electronic overload protection and over-temperature switch-off.


**Mounting:** screw mounting plate.

After the rotary switch setting, pull the red insulating cap and attach the knob. The insulating cap should be remained for future use in the DTD65L. Then put up the frame and attach the front panel.



**Important! Before mounting and removal, always disconnect the power supply!**

#### Function rotary switches

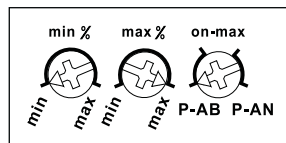

Minimum brightness (fully dimmed down) is adjustable **using the left % rotary switch.**

**Use the middle % rotary switch** to set the maximum brightness (fully dimmed up).

**The right rotary switch** allows to choose the dimming technology: **trailing edge** with memory (**P-AB**), **trailing edge** without memory (**P-AB on-max**), **leading edge** with memory (**P-AN**) or leading edge without memory (**P-AN on-max**).

The adjusted brightness stays saved at turning off if the **memory function** is active. At **on-max function** it turns on always with 100% brightness, by this way ESL can be switched.

#### Operation:

**Press the middle of the rotary knob** to switch on with memory value and to switch off and save the current dimming value.

**Turn to the right (clockwise) to dim up.**

The turning speed determines the dim-up speed.

If the dimming actuator was switched off to the right at the start of dimming, switch-on is at minimum brightness followed by gradual dim-up. **This is the children's room circuit.**

**When the rotary knob is turned jerkily to the right** – dim-up is rapid to the maximum brightness adjusted.

**Turn to the left (anticlockwise) to dim-down** to the minimum brightness adjusted.

The turning speed determines the dim-down speed.

**When the rotary knob is turned jerkily to the left**, dim-down is rapid to the minimum brightness adjusted.

If the dimming switch was switched off to the left at the start of turning, switch-on is at minimum brightness followed by gradual dim-up by turning to the right.

**Control is also possible using a 230V control pushbutton in addition to the rotary knob:** Short commands switch on/off, continuous activation changes brightness up to maximum or minimum value. If you interrupt activation, it changes the dimming direction.


**Children's room circuit with control pushbutton:** Press the control pushbutton for a long time to switch on at minimum brightness, then continue pressing the pushbutton to dim up the lights slowly without changing the last dimming value stored.

#### Sleep time with control pushbutton:

A double pulse dims down and switches off the lighting from the current dimming position through to minimum brightness.

The maximum dimming time of 60 minutes is dependent on the current dimming position and the adjusted minimum brightness and can therefore be shortened as required. Tap briefly at any time during dim-down process to switch off. Press long during the dimming-down process to dim up and end the sleep timer.

#### Typical connection

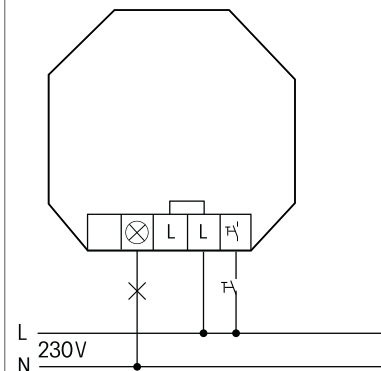

#### Technical data

Incandescent and halogen lamps 230V (R)	up to 200W <sup>1)</sup>
Inductive transformers (L)	–
Electronic transformers (C)	up to 200W <sup>1)2)</sup>
Dimmable energy saving lamps ESL	up to 200W <sup>1)3)</sup>
Dimmable 230V LEDs	up to 200W <sup>1)3)5)</sup>
Max./min. temperature at mounting location	+50°C/-20°C <sup>4)</sup>
Standby loss (activ power)	0.5 W

- <sup>1)</sup> The switching capacity depends on the ventilation conditions.
- <sup>2)</sup> **When calculating the load a loss of 5% for capacitive (electronic) transformers must be considered in addition to the lamp load.**
- <sup>3)</sup> If energy savings lamps or 230V LED are used in the leading edge operating mode (P-AN), the maximum load is only up to 40W.
- <sup>4)</sup> Affects the max. switching capacity.
- <sup>5)</sup> Different lamp electronics may result in restricted dimming areas, on/off problems and a limited maximum number of lamps (to 10 units), especially if the connected load is very low (e.g. with 5W LEDs).

**Must be kept for later use!**

#### Eltako GmbH

D-70736 Fellbach

#### Technical Support English:

☎ Michael Thünte +49 176 13582514

✉ thunte@eltako.de

☎ Marc Peter +49 173 3180368

✉ marc.peter@eltako.de

eltako.com