


## A2Z12-UC



**1+1 NO contact potential free 10 A/250 V AC. Incandescent lamps 1000 W. Standby loss 0.4 watt only.**

Modular device for DIN EN 60715 TH35 rail mounting.

1 module = 18 mm wide, 58 mm deep.

State-of-the-art hybrid technology combines advantages of nonwearing electronic control with high capacity of special relays.

Universal control voltage input 8 to 230V UC. Supply voltage is same as the control voltage.

Contact position display with two LEDs. Very low switching noise.

**By using a bistable relay coil power loss and heating is avoided even in the on mode.**


The switched consumer may not be connected to the mains before the short automatic synchronisation after installation has terminated.

In case of a power failure the system is disconnected in a preset sequence.

When the control voltage is applied, the time lapse T1 starts between 0 and 60 seconds.


At the end of the time lapse, contact 1-2 closes and time lapse T2 starts between 0 and 60 seconds. At the end of this time lapse, contact 3-4 closes. After an interval, the time lapse starts again at T1.

### Function rotary switches

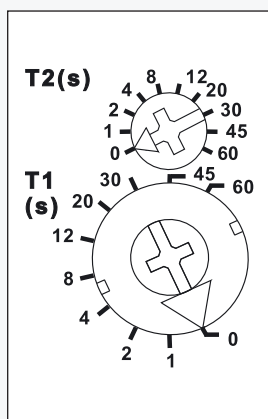

Standard setting ex factory.

### Typical connection

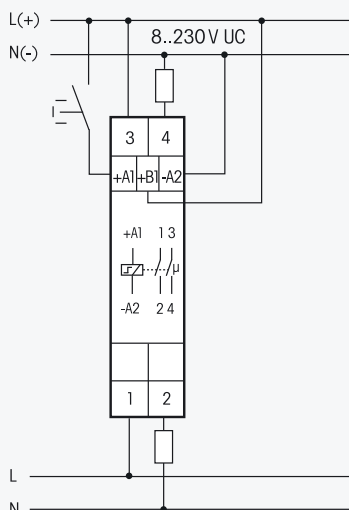

Technical data page 13-13.

Housing for operating instructions GBA12, see accessoires, chapter Z.

**A2Z12-UC**

1+1 NO 10A

EAN 4010312603178

**60,70 €/pc.**

Recommended retail prices excluding VAT.