

## PTN12-230V

min



16	L
	L
	$\mu$
	I
16	18
18	N

**Test pushbutton for emergency lighting systems with its own battery supply. 1 CO contact 16 A/250 V AC. Off-delay settable between 10 and 180 minutes. Only 0.5 watt standby loss.**


Modular device for DIN-EN 60715 TH35 rail mounting. 1 module = 18 mm wide, 58 mm deep. Supply voltage 230 V, 50/60 Hz.

Off-delay 10, 20, 30, 40, 50, 60, 90, 120, 150 and 180 minutes settable with rotary switch.

When the supply voltage is applied, the green LED lights up.

For further informations see the operating instructions.

### Typical connections

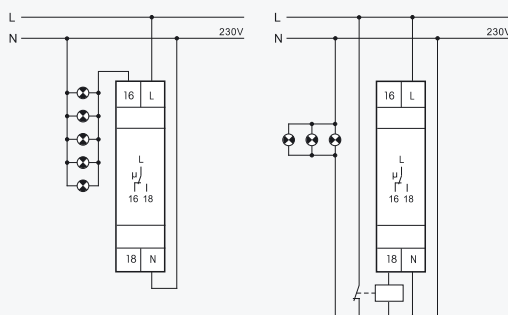


Direct control of the emergency light systems  $I \leq 16 \text{ A}$

⚡ Emergency light systems with own battery supply

Control of emergency light systems via electric contactor  $I > 16 \text{ A}$

⚡ Emergency light systems with own battery supply

### Function rotary switch



Standard setting ex works.