

FPP12



Wireless Powernet phase coupler to transmit wireless telegrams over the 230V power mains. Only 0.2 watt standby loss.

Modular device for DIN-EN 60715 TH35 rail mounting.


1 module = 18mm wide, 58mm deep.

Voltage between the two outer conductors: 400V/50Hz.

The phase coupler increases the capacitive coupling between 2 different outer conductors if, for example, the cables within the installation are not laid in parallel at a distance of at least several metres apart (as ribbon cables or jacketed cables).

Caution: The phase coupler may only be connected to the input side of the line circuit-breaker.

Typical connection

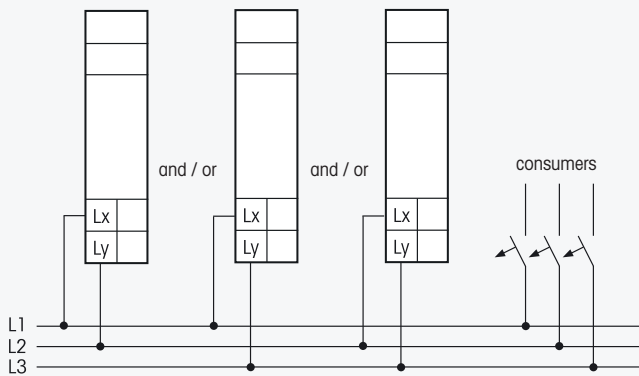

FPP12

Wireless Powernet phase coupler

EAN 4010312311769

25,40 €/pc.

Recommended retail prices excluding VAT.