

Rocker pushbutton



WT55

**Only skilled electricians may install this electrical equipment otherwise there is the risk of fire or electric shock!**

Temperature at mounting location:

-20°C up to +50°C.

Storage temperature: -25°C up to +70°C.

Relative humidity:

annual average value <75%.

Rocker pushbutton, 1 CO contact  
 10A/250V AC. Pushbutton for single  
 mounting, 80x80 mm external  
 dimensions, internal frame dimensions  
 55x55 mm, 15 mm high.


The scope of supply comprises the  
 frame R, one rocker W55 and the rocker  
 pushbutton insert.

The rocker pushbutton with VDE sign  
 has plug-in terminals.

Alternatively to claw fixing, screw fixing  
 is also available for 55 mm switch boxes  
 with stainless steel countersunk screws  
 2.9x25 mm, DIN 7982 C.

**Installation:** Fit rocker pushbutton, fix  
 frame using attachment frame and plug  
 on rocker.

### Wiring diagram

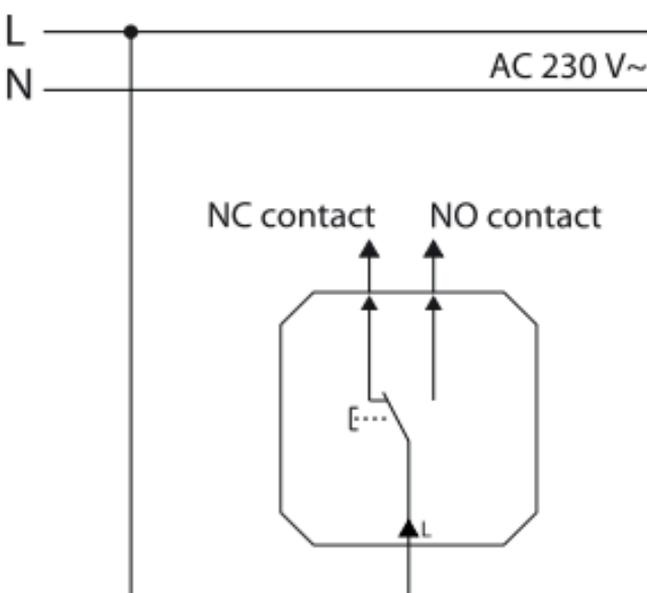

**Must be kept for later use!**

### Eltako GmbH

D-70736 Fellbach

#### Technical Support English:

☎ Michael Thünte +49 176 13582514

✉ [thuente@eltako.de](mailto:thuente@eltako.de)

☎ Marc Peter +49 173 3180368

✉ [marc.peter@eltako.de](mailto:marc.peter@eltako.de)

[eltako.com](http://eltako.com)