

**F1T55E-  
F4T65-  
FTKE-**



**7 PASSIVE WIRELESS SENSORS SEND WIRE-  
LESS TELEGRAMS WHEN THEY ARE TRIGGERED  
MANUALLY**

# Passive wireless sensors

## E-Design55

<b>NEW</b>	Wireless 1-way pushbutton, 5 colors <a href="#">FIT55E-</a> and wireless 2-way pushbutton, 5 colors <a href="#">F2T55E-</a>	7-3
<b>NEW</b>	wireless 2-way pushbutton, 5 colors with battery <a href="#">F2T55EB-</a>	7-3
<b>NEW</b>	Wireless 2-way central control pushbutton, 5 colors <a href="#">F2ZT55E-</a> and wireless 4-way pushbutton, 5 colors <a href="#">F4T55E-</a>	7-4
<b>NEW</b>	Wireless 4-way pushbutton, 5 colors with battery <a href="#">F4T55EB-</a>	7-4
	Wireless 6-way pushbutton <a href="#">F6T55B-</a> and wireless rotary switch with battery, 5 colors <a href="#">FDT55EB-wg</a>	7-5
	Wireless pushbutton actuator dimming <a href="#">FTA55D-wg</a>	7-5
	Wireless pushbutton actuator dimmer without N connection <a href="#">FTA55DL-wg</a> and wireless pushbutton actuator shading <a href="#">FTA55J-wg</a>	7-6
	Wireless pushbutton actuator light switch <a href="#">FTA55L-wg</a>	7-6

## E-Design65

<b>NEW</b>	Wireless 1-way pushbutton <a href="#">FIT65-wg</a> and wireless 2-way pushbutton <a href="#">F2T65-wg</a>	7-7
<b>NEW</b>	wireless 2-way pushbutton with battery <a href="#">F2T65B-wg</a>	7-7
	Wireless 4-way pushbutton <a href="#">F4T65-wg</a> and wireless 4-way pushbutton with battery <a href="#">F4T65B-wg</a>	7-8
	Wireless 6-way pushbutton with battery <a href="#">F6T65B-wg</a>	7-8
	Wireless 2-way central control pushbutton <a href="#">F2ZT65-wg</a> and wireless 4-way profile pushbutton <a href="#">F4PT-wg</a>	7-9
	Wireless rotary switch with battery <a href="#">FDT65B-wg</a>	7-9
	Wireless pushbutton actuator dimming <a href="#">FTA65D-wg</a> and wireless pushbutton actuator dimmer without N connection <a href="#">FTA65DL-wg</a>	7-10
	Wireless pushbutton actuator shading <a href="#">FTA65J-wg</a>	7-10
	Wireless pushbutton actuator light switch <a href="#">FTA65L-wg</a> and wireless card switch <a href="#">FKF65-wg</a>	7-11
	Wireless pull switch <a href="#">FZS65-wg</a>	7-11
	Bus 4-way pushbutton to FTS14TG <a href="#">B4T65-wg</a> and rocker switch mechanically <a href="#">WS65-wg</a>	7-12
	Rocker pushbutton mechanically <a href="#">WT65-wg</a>	7-12
<b>NEW</b>	Rocker pushbutton mechanically <a href="#">W2T65-wg</a>	7-13

## E-Design65 flat

	Wireless 1-way flat pushbutton <a href="#">FIT65-wg</a> and wireless 2-way flat pushbutton <a href="#">F2FT65-wg</a>	7-14
	Wireless 4-way flat pushbutton <a href="#">F4FT65-wg</a>	7-14
	Wireless 2-way central control flat pushbutton with battery <a href="#">F2FZT65B-wg</a> and Wireless 2-way flat pushbutton with battery <a href="#">F2FT65B-wg</a>	7-15
	Wireless 4-way flat pushbutton with battery <a href="#">F4FT65B-wg</a>	7-15
	Wireless flat rotary switch <a href="#">FDTF65B-wg</a> and wireless flat pushbutton actuator dimming <a href="#">FFTA65D-wg</a>	7-16
	Wireless flat pushbutton actuator dimmer without N connection <a href="#">FFTA65DL-wg</a>	7-16
	Wireless flat pushbutton actuator shading <a href="#">FFTA65J-wg</a> and wireless flat pushbutton actuator light switch <a href="#">FFTA65L-wg</a>	7-17
	Bus 4-way flat pushbutton to FTS14TG <a href="#">B4FT65-wg</a>	7-17

## 55x55mm

Wireless 4-way pushbutton, 6 colors <a href="#">FT55-</a> and wireless 4-way pushbutton, 5 colors with battery <a href="#">F4T55B-</a>	7 - 18
Wireless 2-way pushbutton <a href="#">FZT55-wg</a>	7 - 18
Wireless 4-way profile pushbutton <a href="#">F4PT55-wg</a> and wireless rotary switch with battery <a href="#">FDT55B-wg</a>	7 - 19
Bus 4-way pushbutton, 4 colors to FTS14TG <a href="#">B4T55-</a>	7 - 19
Rocker switch mechanically, 4 colors <a href="#">WS55-</a> and rocker pushbutton mechanically, 4 colors <a href="#">WT55-</a>	7 - 20
<b>NEW</b> Rocker pushbutton mechanically <a href="#">W2T55-wg</a>	7 - 20
Wireless 4-way pushbutton Schneider Belgien, Schneider-white <a href="#">FT4BS-ws</a> and wireless 4-way pushbutton Niko Belgium, 3 colors <a href="#">FT4B-</a>	7 - 21
Wireless 4-way pushbutton Bticino, 2 colors <a href="#">FT4BI-</a>	7 - 21
Wireless 4-way pushbutton Legrand Belgium, Legrand-white <a href="#">FT4BL-lw</a> and wireless 4-way pushbutton Feller Swiss, 3 colors <a href="#">FT4CH-</a>	7 - 22
Wireless 4-way pushbutton Feller Swiss, with arrows up and down <a href="#">FT4CH+2P-w</a>	7 - 22
Wireless 4-way pushbutton Eljo Sweden, Eljo-white <a href="#">FT4S-ws</a> and wireless 4-way pushbutton Exxact Sweden, pure white glossy <a href="#">FT55ES-wg</a>	7 - 23
Wireless 4-way pushbutton Jussi Schweden, Jussi-white <a href="#">FT55RS-alpinweiß</a>	7 - 23
Wireless 4-way pushbutton Elko Finland, Elko-white <a href="#">FT55EL-ws</a> and wireless 4-way pushbutton Busch, 2 colors <a href="#">FT55R-</a>	7 - 24
Wireless 4-way pushbutton Berker and Merten, 5 colors <a href="#">FT55AH-</a>	7 - 24
Wireless 2-way mini pushbuttons 2 colors <a href="#">FMT55/2-</a> and wireless 4-way mini pushbuttons 2 colors <a href="#">FMT55/4-</a>	7 - 25

## Others

Wireless sensor remote control <a href="#">FFD-al/anso</a> and wireless sensor remote control <a href="#">FF8-al/anso</a>	7 - 26
Wireless sensors mini hand-held transmitters <a href="#">FMH8-</a>	7 - 26
<b>NEW</b> Wireless 2-way hand-held transmitter <a href="#">FHS2-al/anso</a> and wireless 4-way hand-held transmitter <a href="#">FHS4-al/anso</a>	7 - 27
<b>NEW</b> Wireless bell pushbutton <a href="#">FKD-wg</a> and wireless keyswitch with battery <a href="#">FSTAP-al/sz</a>	7 - 28
Wireless infrared converter <a href="#">FIW-USB</a>	7 - 28
Wireless window/door contacts with solar cell, 2 colors <a href="#">FTK-</a> and wireless window/door contact with solar cell and battery <a href="#">FTKB-rw</a>	7 - 29
Wireless window handle sensor <a href="#">FFG7B-rw</a>	7 - 29
<b>NEW</b> Wireless window/door contact with battery <a href="#">FFKB-rw</a> and wireless window touch contact with energy generator <a href="#">FFTE-rw</a>	7 - 30
Wireless window/door contact with energy generator <a href="#">FTKE-rw</a>	7 - 30
Wireless position switches blue with energy generator <a href="#">FPE-1</a> and wireless encryption plug <a href="#">FVST</a>	7 - 31
Mounting brackets <a href="#">BW3</a> and wireless window/door contact with battery <a href="#">FTKB-gr</a>	7 - 32
Wireless window/door contact with battery <a href="#">FTKB-hg</a>	7 - 32
Wireless sensors mini hand-held transmitters <a href="#">FMH2-</a> and wireless sensors mini hand-held transmitters <a href="#">FMH2S-</a>	7 - 33
Wireless sensors mini hand-held transmitters <a href="#">FMH4-</a>	7 - 33
Wireless sensors mini hand-held transmitters <a href="#">FMH4S-</a> and wireless sensor mini hand-held transmitter for calling systems <a href="#">FMH2S-rw</a>	7 - 34
Waterproof mini hand-held transmitter <a href="#">FMHIW-sz</a>	7 - 34
<b>NEW</b> Wireless pushbutton tracker with battery <a href="#">FTTB</a>	7 - 35
Wireless 4-way flat pushbutton, 6 colors <a href="#">FT4F-</a>	7 - 35



Wireless pushbutton with rocker

## FIT55E-wg



**Wireless 1-way pushbutton in E-Design55, 80 x 80 mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker. Smart Home sensor.**

<b>FIT55E-al</b>	Wireless pushbutton 55 x 55 mm without battery or wire, coated/aluminium paint	EAN 4010312321195	<b>43,30 €/pc.</b>
<b>FIT55E-ag</b>	Wireless pushbutton 55 x 55 mm without battery or wire, anthracite glossy	EAN 4010312321201	<b>35,50 €/pc.</b>
<b>FIT55E-wg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, pure white glossy	EAN 4010312321096	<b>35,50 €/pc.</b>
<b>FIT55E-gw</b>	Wireless pushbutton 55 x 55 mm without battery or wire, glossy white	EAN 4010312321218	<b>35,50 €/pc.</b>
<b>FIT55E-sg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, black glossy	EAN 4010312321225	<b>35,50 €/pc.</b>

7-3



Wireless pushbutton with rocker

## F2T55E-



**Wireless 2-way pushbutton in E-Design55, 80 x 80 mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker. Smart Home sensor.**

<b>F2T55E-al</b>	Wireless pushbutton 55 x 55 mm without battery or wire, coated/aluminium paint	EAN 4010312319932	<b>47,60 €/pc.</b>
<b>F2T55E-ag</b>	Wireless pushbutton 55 x 55 mm without battery or wire, anthracite glossy	EAN 4010312319963	<b>39,80 €/pc.</b>
<b>F2T55E-wg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, pure white glossy	EAN 4010312319918	<b>39,80 €/pc.</b>
<b>F2T55E-gw</b>	Wireless pushbutton 55 x 55 mm without battery or wire, glossy white	EAN 4010312319925	<b>39,80 €/pc.</b>
<b>F2T55E-sg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, black glossy	EAN 4010312319956	<b>39,80 €/pc.</b>



Wireless pushbutton with rocker

## F2T55EB-



**Wireless 2-way pushbutton in E-Design55, 80 x 80 mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Whisper quiet and with battery (lifetime 2-5 years). With rocker. Smart Home sensor.**

<b>F2T55EB-al</b>	Wireless pushbutton 55 x 55 mm without wire, coated/aluminium paint	EAN 4010312321188	<b>62,70 €/pc.</b>
<b>F2T55EB-ag</b>	Wireless pushbutton 55 x 55 mm without wire, anthracite glossy	EAN 4010312321140	<b>54,90 €/pc.</b>
<b>F2T55EB-wg</b>	Wireless pushbutton 55 x 55 mm without wire, pure white glossy	EAN 4010312321171	<b>54,90 €/pc.</b>
<b>F2T55EB-gw</b>	Wireless pushbutton 55 x 55 mm without wire, glossy white	EAN 4010312321157	<b>54,90 €/pc.</b>
<b>F2T55EB-sg</b>	Wireless pushbutton 55 x 55 mm without wire, black glossy	EAN 4010312321164	<b>54,90 €/pc.</b>



Wireless pushbutton with laser engraved rocker

7-4



Wireless pushbutton with double rocker

## F2ZT55E-



**Wireless 2-way pushbutton in E-Design55, 80 x 80 mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With laser engraved rocker. Smart Home sensor.**

<b>F2ZT55E-al</b>	Wireless pushbutton 55 x 55 mm without battery or wire, coated/aluminium paint	EAN 4010312320518	<b>53,40 €/pc.</b>
<b>F2ZT55E-ag</b>	Wireless pushbutton 55 x 55 mm without battery or wire, anthracite glossy	EAN 4010312320549	<b>45,60 €/pc.</b>
<b>F2ZT55E-wg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, pure white glossy	EAN 4010312319994	<b>45,60 €/pc.</b>
<b>F2ZT55E-gw</b>	Wireless pushbutton 55 x 55 mm without battery or wire, glossy white	EAN 4010312320501	<b>45,60 €/pc.</b>
<b>F2ZT55E-sg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, black glossy	EAN 4010312320525	<b>45,60 €/pc.</b>

## F4T55E-



**Wireless 4-way pushbutton in E-Design55, 80 x 80 mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With double rocker. Smart Home sensor.**

<b>F4T55E-al</b>	Wireless pushbutton 55 x 55 mm without battery or wire, coated/aluminium paint	EAN 4010312319901	<b>47,60 €/pc.</b>
<b>F4T55E-ag</b>	Wireless pushbutton 55 x 55 mm without battery or wire, anthracite glossy	EAN 4010312319895	<b>39,80 €/pc.</b>
<b>F4T55E-wg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, pure white glossy	EAN 4010312319833	<b>39,80 €/pc.</b>
<b>F4T55E-gw</b>	Wireless pushbutton 55 x 55 mm without battery or wire, glossy white	EAN 4010312319864	<b>39,80 €/pc.</b>
<b>F4T55E-sg</b>	Wireless pushbutton 55 x 55 mm without battery or wire, black glossy	EAN 4010312319888	<b>39,80 €/pc.</b>

## F4T55EB-



**Wireless 4-way pushbutton in E-Design55, 80 x 80 mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Whisper quiet and with battery (lifetime 2-5 years). With double rocker. Smart Home sensor.**

<b>F4T55EB-al</b>	Wireless pushbutton 55 x 55 mm without wire, coated/aluminium paint	EAN 4010312320563	<b>64,30 €/St.</b>
<b>F4T55EB-ag</b>	Wireless pushbutton 55 x 55 mm without wire, anthracite glossy	EAN 4010312320587	<b>56,50 €/St.</b>
<b>F4T55EB-wg</b>	Wireless pushbutton 55 x 55 mm without wire, pure white glossy	EAN 4010312320570	<b>56,50 €/St.</b>
<b>F4T55EB-gw</b>	Wireless pushbutton 55 x 55 mm without wire, glossy white	EAN 4010312320556	<b>56,50 €/St.</b>
<b>F4T55EB-sg</b>	Wireless pushbutton 55 x 55 mm without wire, black glossy	EAN 4010312321133	<b>56,50 €/St.</b>



Keypad with laser engraving



## F6T55B-

Wireless 6-way pushbutton for single mounting 80 x 80 x 15 mm or mounting into the E-Design55 switching system. Silent and with battery (lifetime 5-8 years). Smart Home sensor.

<b>F6T55B-wg</b>	Wireless 6-way pushbutton without wire, pure white glossy	EAN 4010312318935	<b>68,40 €/pc.</b>
<b>F6T55B-Keypad</b>	Wireless 6-way pushbutton without wire as keypad, laser engraved, pure white glossy	EAN 4010312319116	<b>74,90 €/pc.</b>

## FDT55EB-

1-way wireless rotary switch for single mounting 80 x 80 x 25 mm over a flush box or mounting into the E-Design55 switching system. With battery (lifetime 2-8 years). Smart Home sensor.

<b>FDT55EB-al</b>	Wireless rotary switch coated/aluminium paint 55 x 55 mm without wire	EAN 4010312320655	<b>69,50 €/pc.</b>
<b>FDT55EB-ag</b>	Wireless rotary switch anthracite glossy 55 x 55 mm without wire	EAN 4010312320662	<b>61,70 €/pc.</b>
<b>FDT55EB-wg</b>	Wireless rotary switch pure white glossy 55 x 55 mm without wire	EAN 4010312319987	<b>61,70 €/pc.</b>
<b>FDT55EB-gw</b>	Wireless rotary switch glossy white 55 x 55 mm without wire	EAN 4010312320686	<b>61,70 €/pc.</b>
<b>FDT55EB-sg</b>	Wireless rotary switch black glossy 55 x 55 mm without wire	EAN 4010312320679	<b>61,70 €/pc.</b>

## FTA55D-wg

Wireless pushbutton actuator dimming. For single mounting 80 x 80 x 15/33 mm or mounting into the E-Design55 switching system. Pure white glossy. With power MOSFET. 230 V incandescent lamps and halogen lamps up to 300 W, 230 V LEDs up to 100 W. No inductive (wound) transformers. With switching operation for children's rooms and snooze function. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Standby loss only 0.7 watt. Smart Home sensor and actuator.

<b>FTA55D-wg</b>	Wireless pushbutton actuator dimmer, pure white glossy	EAN 4010312319222	<b>74,80 €/pc.</b>
------------------	--	-------------------	--------------------



## FTA55DL-wg

Wireless pushbutton actuator dimming without N connection. For single mounting 80 x 80 x 15/33 mm or mounting into the E-Design55 switching system. Pure white glossy. With Power MOSFET. 230 V incandescent lamps and halogen lamps up to 200 W, depending on ventilation conditions. Dimmable energy saving lamps ESL and 230V LED lamps in 'trailing edge' mode up to 200 W or up to 40 W in 'leading edge' mode, depending on ventilation conditions. Min. load 20 W at 'trailing edge' mode and 8 W at 'leading edge' mode. No inductive (wound) transformers. With switching operation for children's rooms and snooze function. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Only 0.7 watt standby loss. Smart Home sensor and actuator.

FTA55DL-wg	Wireless pushbutton actuator dimmer without N connection, pure white glossy	EAN 4010312319239	74,80 €/pc.
------------	---	-------------------	-------------

## FTA55J-wg

Wireless pushbutton actuator shading, 1+1 NO contact 4 A/250 V AC for one shading element motor. For single mounting 80 x 80 x 15/33 mm or mounting into the E-Design55 switching system. Pure white glossy. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Only 0.8 watt standby loss. Smart Home sensor and actuator.

FTA55J-wg	Wireless pushbutton actuator shading, pure white glossy	EAN 4010312319246	68,20 €/pc.
-----------	---	-------------------	-------------

## FTA55L-wg

Wireless pushbutton actuator light switch 10 A/250 V AC. For single mounting 80 x 80 x 15/33 mm or mounting into the E-Design55 switching system. Pure white glossy. Impuls switch with 1 NO contact, not potentialfree, 230V incandescent and halogen lamps 1000W, ESL and 230V LED lamps up to 200W. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Standby loss 0.8 watt only. Smart Home sensor and actuator.

FTA55L-wg	Wireless pushbutton actuator light switch, pure white glossy	EAN 4010312319253	67,50 €/pc.
-----------	--	-------------------	-------------



Wireless pushbutton with rocker

## F1T65-wg



Wireless 1-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. Smart Home sensor.

F1T65-wg	Wireless 1-way pushbutton without battery and wire, pure white glossy	EAN 4010312321089	35,50 €/pc.
----------	---	-------------------	-------------

7-7



Wireless pushbutton with rocker

## F2T65-wg



Wireless 2-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker. Smart Home sensor.

F2T65-wg	Wireless pushbutton without battery or wire, pure white glossy	EAN 4010312319321	39,80 €/pc.
----------	--	-------------------	-------------



Wireless pushbutton with rocker


## F2T65B-wg



Wireless 2-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Silent and with battery (lifetime 2-5 years). With rocker. Smart Home sensor.


F2T65B-wg	Wireless pushbutton without wire, pure white glossy	EAN 4010312321126	54,90 €/pc.
-----------	---	-------------------	-------------






Wireless pushbutton with double rocker

7-8



Wireless pushbutton with double rocker



Keypad with laser engraving

Recommended retail prices excluding VAT.

## F4T65-wg

Wireless 4-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With double rocker. Smart Home sensor.



F4T65-wg	Wireless pushbutton without battery or wire, pure white glossy	EAN 4010312315965	39,80 €/pc.
----------	--	-------------------	-------------

## F4T65B-wg

Wireless 4-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Silent and with battery (lifetime 2-5 years). With double rocker. Smart Home sensor.

F4T65B-wg	Wireless pushbutton without wire, pure white glossy	EAN 4010312315972	56,50 €/pc.
-----------	---	-------------------	-------------

## F6T65B-

Wireless 6-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Silent and with battery (lifetime 5-8 years). Smart Home sensor.

F6T65B-wg	Wireless 6-way pushbutton without wire, pure white glossy	EAN 4010312318584	68,40 €/pc.
F6T65B-Keypad	Wireless 6-way pushbutton as keypad without wire, pure white glossy	EAN 4010312319123	74,90 €/pc.



Wireless pushbutton with rocker laser engraved



Wireless pushbutton with double rocker



Recommended retail prices excluding VAT.

F2ZT65-wg



Wireless 2-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker laser engraved. Smart Home sensor.

F2ZT65-wg	Wireless pushbutton without battery or wire, pure white glossy	EAN 4010312318751	45,60 €/pc.
-----------	--	-------------------	-------------

7-9

F4PT-wg



Wireless 4-way pushbutton pure white glossy for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With laser engraved double rocker. Smart Home sensor.

Rocker laser engraved with 'Home Day/Night', 'Away' and 'Vacation'.  
The mounting panel can only be screwed on a flat surface or fixed to the wall, on glass or furniture using the enclosed adhesive film. By means of a 55 mm switch box, use the sleeves for screw connection supplied in the socket.

F4PT-wg	4-way profile pushbutton, pure white glossy	EAN 4010312317396	42,90 €/pc.
---------	---	-------------------	-------------

FDT65B-wg

Wireless 1-way rotary switch for single mounting 84 x 84 x 25 mm or mounting into the E-Design65 switching system. With battery (lifetime 2-8 years). Smart Home sensor.

FDT65B-wg	Wireless rotary switch without wire, pure white glossy	EAN 4010312317273	61,70 €/pc.
-----------	--	-------------------	-------------



## FTA65D-wg

Wireless pushbutton actuator dimming. For single mounting 84 x 84 x 16/33 mm or mounting into the E-Design65 switching system. Pure white glossy. With Power MOSFET. 230 V incandescent and halogen lamps up to 300 W, 230 V LED lamps up to 100 W. No inductive (wound) transformers. With switching operation for children's rooms and snooze function. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Only 0.7 watt standby loss. Smart Home sensor and actuator.

FTA65D-wg	Wireless pushbutton actuator dimming, pure white glossy	EAN 4010312319185	74,80 €/pc.
-----------	---	-------------------	-------------

## FTA65DL-wg


Wireless pushbutton actuator dimming without N connection. For single mounting 84 x 84 x 16/33 mm or mounting into the E-Design65 switching system. Pure white glossy. With Power MOSFET. Incandescent and halogen lamps up to 200 W, depending on ventilation conditions. Energy saving lamps ESL and 230 V LED lamps in 'trailing edge' mode up to 200 W or up to 40 W in 'leading edge' mode, depending on ventilation conditions. Min. load 20W at 'trailing edge' mode and 8 W at 'leading edge' mode. No inductive (wound) transformers. With switching operation for children's rooms and snooze function. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Only 0.7 watt standby loss. Smart Home sensor and actuator.

FTA65DL-wg	Wireless pushbutton actuator dimmer without N connection, pure white glossy	EAN 4010312319192	74,80 €/pc.
------------	---	-------------------	-------------

## FTA65J-wg

Wireless pushbutton actuator shading, 1+1 NO contact 4 A/250 V AC for one shading element motor. For single mounting 84 x 84 x 16/33 mm or mounting into the E-Design65 switching system. Pure white glossy. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Only 0.8 watt standby loss. Supply voltage 230 V. Smart Home sensor and actuator.

FTA65J-wg	Wireless pushbutton actuator shading, pure white glossy	EAN 4010312319208	68,20 €/pc.
-----------	---	-------------------	-------------

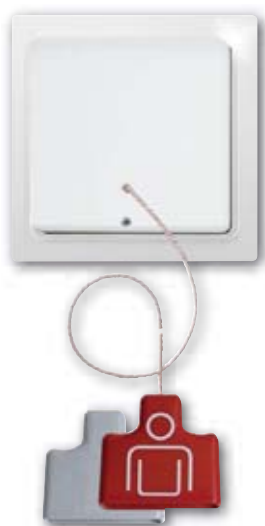

## FTA65L-wg

Wireless pushbutton actuator light switch 10 A/250 V AC. For single mounting 84 x 84 x 16/33 mm or mounting into the E-Design65 switching system. Pure white glossy. Impuls switch with 1 NO contact, not potentialfree, 230 V incandescent and halogen lamps 1000 W, ESL and 230 V LED lamps up to 200 W. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Standby loss 0.8 watt only. Smart Home sensor and actuator.

<b>FTA65L-wg</b>	Wireless pushbutton actuator light switch, pure white glossy	EAN 4010312319215	<b>67,50 €/pc.</b>
------------------	--	-------------------	--------------------

7-11

## FKF65-wg

Wireless card switch for surface mounting 84 x 84 x 29 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. Smart Home sensor.

<b>FKF65-wg</b>	Key card switch, pure white glossy	EAN 4010312316115	<b>53,20 €/pc.</b>
-----------------	------------------------------------	-------------------	--------------------

## FZS65-wg




Wireless pull switch for surface mounting 84 x 84 x 24 mm or mounting into the E-Design65 switching system. With grey and red handle. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. Smart Home Sensor.

<b>FZS65-wg</b>	Wireless pull switch, pure white glossy	EAN 4010312316139	<b>67,90 €/pc.</b>
-----------------	---	-------------------	--------------------



Bus pushbutton with double rocker



Bus pushbutton with rocker



# B4T65-wg

Bus 4-way pushbutton for single mounting 84 x 84 x 16 mm or mounting into the E-Design65 switching system. For connection to FTS14TG pushbutton gateway. Only 0.2 watt standby loss. With rocker and double rocker. Smart Home sensor.

B4T65-wg	Bus pushbutton in E-design, pure white glossy	EAN 4010312315675	42,10 €/pc.
----------	---	-------------------	-------------

# WS65-wg


Rocker switch, 1 CO contact 10 A/250 V AC. Switch for single mounting 84 x 84 x 22 mm or mounting into the E-Design65 switching system.

WS65-wg	Rocker switch 1 CO contact, pure white glossy	EAN 4010312317341	12,20 €/pc.
---------	---	-------------------	-------------

# WT65-wg

Rocker pushbutton, 1 NO contact 10 A/250 V AC. Pushbutton for single mounting 84 x 84 x 22 mm or mounting into the E-Design65 switching system.

WT65-wg	Rocker pushbutton 1 NO contact, pure white glossy	EAN 4010312317334	12,20 €/pc.
---------	---	-------------------	-------------



# W2T65-wg

NEW

Rocker pushbutton with double rocker, 2 NO contacts 10 A/250 V AC. Pushbutton for single mounting 84 x 84 x 22 mm or mounting into the E-Design65 switching system.

W2T65-wg	Rocker pushbutton 2 NO contacts, pure white glossy	EAN 4010312320594	15,20 €/pc.
----------	--	-------------------	-------------



## F1FT65-wg



Wireless 1-way flat pushbutton for single mounting 84 x 84 x 11 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. Smart Home sensor.

F1FT65-wg	Wireless flat pushbutton without battery or wire, pure white glossy	EAN 4010312315958	37,90 €/pc.
-----------	---	-------------------	-------------




Wireless flat pushbutton with rocker

## F2FT65-wg



Wireless 2-way flat pushbutton for single mounting 84 x 84 x 11/7 mm or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker. Smart Home sensor.

F2FT65-wg	Wireless flat pushbutton, pure white glossy	EAN 4010312319307	39,80 €/pc.
-----------	---	-------------------	-------------



Wireless flat pushbutton with double rocker

## F4FT65-wg



Wireless 4-way flat pushbutton for single mounting 84 x 84 x 11/7 mm over a flush box or mounting into the E-Design65 switching system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With double rocker. Smart Home sensor.

F4FT65-wg	Wireless flat pushbutton, pure white glossy	EAN 4010312318485	39,80 €/pc.
-----------	---	-------------------	-------------





Wireless flat pushbutton  
with rocker laser engraved

## F2FZT65B-wg

Wireless 2-way flat pushbutton for single mounting 84 x 84 x 11 mm or mounting into the E-Design65 switching system. Whisper quiet and with battery (lifetime 5-8 years). With rocker laser engraved. Smart Home sensor.

F2FZT65B-wg	Wireless flat pushbutton without wire, pure white glossy	EAN 4010312318775	45,60 €/pc.
-------------	---	-------------------	-------------

7-15




Wireless pushbutton with rocker

## F2FT65B-wg

Wireless 2-way flat pushbutton for single mounting 84 x 84 x 11 mm or mounting into the E-Design65 switching system. Whisper quiet and with battery (lifetime 5-8 years). With rocker. Smart Home sensor.

F2FT65B-wg	Wireless flat pushbutton without wire, pure white glossy	EAN 4010312319314	54,90 €/pc.
------------	---	-------------------	-------------



Wireless pushbutton with double rocker

## F4FT65B-wg

Wireless 4-way flat pushbutton for single mounting 84 x 84 x 11 mm or mounting into the E-Design65 switching system. Whisper quiet and with battery (lifetime 5-8 years). With double rocker. Smart Home sensor.

F4FT65B-wg	Wireless flat pushbutton without wire, pure white glossy	EAN 4010312315989	56,50 €/pc.
------------	---	-------------------	-------------





## FDTF65B-wg

1-way wireless rotary switch flat for single mounting 84 x 84 x 11/9 mm over a flush box or mounting into the E-Design65 switching system. With battery (lifetime 2-8 years). Smart Home sensor.

<b>FDTF65B-wg</b>	Wireless rotary switch flat iwthout wire, pure white glossy	EAN 4010312318843	<b>61,70 €/pc.</b>
-------------------	---	-------------------	--------------------

## FFTA65D-wg

Wireless flat pushbutton actuator dimming. For single mounting 84 x 84 x 11/33 mm or mounting into the E-Design65 switching system. Pure white glossy. With Power MOSFET. 230 V incandescent and halogen lamps up to 300 W, 230 V LED lamps up to 100 W. No inductive (wound) transformers. With switching operation for children's rooms and snooze function. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Only 0.7 watt standby loss. Smart Home sensor and actuator.

<b>FFTA65D-wg</b>	Wireless flat pushbutton actuator dimming, pure white glossy	EAN 4010312319260	<b>79,80 €/pc.</b>
-------------------	--	-------------------	--------------------

## FFTA65DL-wg

Wireless flat pushbutton actuator dimming without N connection. For single mounting 84 x 84 x 11/33 mm or mounting into the E-Design65 switching system. Pure white glossy. With Power MOSFET. Incandescent and halogen lamps up to 200 W, depending on ventilation conditions. 230 V energy saving lamps ESL and 230 V LED lamps in 'trailing edge' mode up to 200 W or up to 40 W in 'leading edge' mode, depending on ventilation conditions. Min. load 20 W at 'trailing edge' mode and 8 W at 'leading edge' mode. No inductive (wound) transformers. With switching operation for children's rooms and snooze function. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Only 0.7 watt standby loss. Smart Home sensor and actuator.

<b>FFTA65DL-wg</b>	Wireless flat pushbutton actuator dimmer without N connection, pure white glossy	EAN 4010312319277	<b>79,80 €/pc.</b>
--------------------	--	-------------------	--------------------



## FFTA65J-wg

Wireless flat pushbutton actuator shading, 1+1 NO contact 4 A/250 V AC for one shading element motor. For single mounting 84 x 84 x 11/33 mm or mounting into the E-Design65 switching system. Pure white glossy. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Only 0.8 watt standby loss. Smart Home sensor and actuator.

<b>FFTA65J-wg</b>	Wireless flat pushbutton actuator shading, pure white glossy	EAN 4010312319284	<b>68,80 €/pc.</b>
-------------------	--	-------------------	--------------------


7-17




## FFTA65L-wg

Wireless flat pushbutton actuator light switch 10 A/250 V AC. For single mounting 84 x 84 x 11/33 mm or mounting into the E-Design65 switching system. Pure white glossy. Impuls switch with 1 NO contact, not potentialfree, 230 V incandescent and halogen lamps 1000 W, ESL and 230 V LED lamps up to 200 W. With integrated universal/direction pushbutton and terminals for additional wired pushbuttons. Supply voltage 230 V. Standby loss 0.8 watt only. Smart Home sensor and actuator.

<b>FFTA65L-wg</b>	Wireless flat pushbutton actuator light switch, pure white glossy	EAN 4010312319291	<b>69,80 €/pc.</b>
-------------------	---	-------------------	--------------------



Bus flat pushbutton with rocker

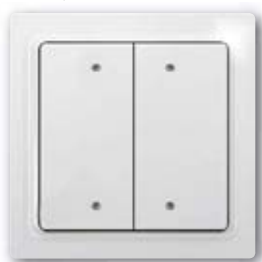

Bus flat pushbutton with double rocker

## B4FT65-wg

Bus 4-way pushbutton for single mounting 84 x 84 x 11 mm or mounting into the E-Design65 switching system. For connection to FTS14TG pushbutton gateway. Only 0.2 watt standby loss. With rocker and double rocker. Smart Home sensor.

<b>B4FT65-wg</b>	Bus flat pushbutton in E-Design, pure white glossy	EAN 4010312315682	<b>42,10 €/pc.</b>
------------------	--	-------------------	--------------------




Wireless pushbutton with rocker



Wireless pushbutton with double rocker



Wireless pushbutton with rocker



Wireless pushbutton with double rocker



Wireless pushbutton with rocker laser engraved

## FT55-



**Wireless 4-way pushbutton, 80x80mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker. Smart Home sensor.**

<b>FT55-al</b>	Wireless pushbutton 55x55 mm w/o battery or wire, coated/aluminium paint	EAN 4010312305829	<b>48,80 €/pc.</b>
<b>FT55-ws</b>	Wireless pushbutton 55x55 mm w/o battery or wire, white	EAN 4010312308936	<b>41,00 €/pc.</b>
<b>FT55-rw</b>	Wirel. pushbutton 55x55 mm w/o battery or wire, pure white	EAN 4010312305775	<b>41,00 €/pc.</b>
<b>FT55-wg</b>	Wireless pushbutton 55x55 mm w/o battery or wire, pure white glossy	EAN 4010312305799	<b>41,00 €/pc.</b>
<b>FT55-sz</b>	Wireless pushbutton 55x55 mm w/o battery or wire, black	EAN 4010312305782	<b>41,00 €/pc.</b>
<b>FT55-an</b>	Wireless pushbutton 55x55 mm w/o battery or wire, anthracite	EAN 4010312305805	<b>41,00 €/pc.</b>

## F4T55B-

**Wireless 4-way pushbutton for single mounting 80 x 80 x 15 mm or mounting in the 55 mm switch system. Whisper quiet and with battery (lifetime 2-5 years). With rocker and double rocker. Smart Home sensor.**

<b>F4T55B-al</b>	Wireless pushbutton 55x55 mm w/o battery or wire, coated/aluminium paint	EAN 4010312316467	<b>61,50 €/pc.</b>
<b>F4T55B-ws</b>	Wireless pushbutton 55x55 mm w/o battery or wire, white	EAN 4010312316511	<b>53,70 €/pc.</b>
<b>F4T55B-rw</b>	Wirel. pushbutton 55x55 mm w/o battery or wire, pure white	EAN 4010312316474	<b>53,70 €/pc.</b>
<b>F4T55B-wg</b>	Wireless pushbutton 55x55 mm w/o battery or wire, pure white glossy	EAN 4010312316498	<b>53,70 €/pc.</b>
<b>F4T55B-an</b>	Wireless pushbutton 55x55 mm w/o battery or wire, anthracite	EAN 4010312316504	<b>53,70 €/pc.</b>

## FZT55-wg



**Wireless 2-way pushbutton, 80x80mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker laser engraved. Smart Home sensor.**

<b>FZT55-wg</b>	Wireless pushbutton 55x55 mm w/o battery or wire, pure white glossy	EAN 4010312318768	<b>45,60 €/pc.</b>
-----------------	---	-------------------	--------------------



Wireless pushbutton with double rocker

## F4PT55-wg



Wireless 4-way wireless pushbutton pure white glossy for single mounting 80 x 80 x 15 mm or mounting in the 55 mm switch system. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With laser engraved double rocker. Smart Home sensor.

Rocker laser engraved with 'Home Day/Night', 'Away' and 'Vacation'.  
The mounting panel can only be screwed on a flat surface or fixed to the wall, on glass or furniture using the enclosed adhesive film. By means of a 55 mm switch box, use the sleeves for screw connection supplied in the socket.

F4PT55-wg	Wireless 4-way profile pushbutton 55x55 mm w/o battery or wire, pure white glossy	EAN 4010312317907	42,90 €/pc.
-----------	---	-------------------	-------------

7-19



## FDT55B-wg

Wireless rotary switch pure white glossy for single mounting 80 x 80 x 25 mm or mounting in the 55 mm switch system. With battery (lifetime 2-8 years). Smart Home sensor.

FDT55B-wg	Wireless rotary switch w/o wire, pure white glossy	EAN 4010312318256	61,70 €/pc.
-----------	--	-------------------	-------------



Bus-Taster mit Doppelwippe

## B4T55-

Bus 4-way pushbutton for single mounting 80 x 80 x 15 mm. For connection to FTS14TG pushbutton gateway. Only 0.2 watt standby loss. With rocker and double rocker. Smart Home sensor.



Bus-Taster mit Wippe

B4T55-wg	Bus pushbutton 55x55 mm, pure white glossy	EAN 4010312316580	42,10 €/pc.
B4T55-an	Bus pushbutton 55x55 mm, anthracite	EAN 4010312316627	42,10 €/pc.



## WS55-

Rocker switch, 1 CO contact 10 A/250 V AC. Switch for single mounting 80 x 80 mm external dimensions, internal frame dimensions 55 x 55 mm, 15 mm high.

WS55-ws	Rocker switch 55 x 55 mm, white	EAN 4010312317440	10,20 €/pc.
WS55-rw	Rocker switch 55 x 55 mm, pure white	EAN 4010312317464	10,20 €/pc.
WS55-wg	Rocker switch 55 x 55 mm, pure white glossy	EAN 4010312317433	10,20 €/pc.
WS55-an	Rocker switch 55 x 55 mm, anthracite	EAN 4010312317488	10,20 €/pc.



## WT55-

Rocker pushbutton, 1 NO contact 10 A/250 V AC. Pushbutton for single mounting 80 x 80 mm external dimensions, internal frame dimensions 55 x 55mm, 15 mm high.

WT55-ws	Rocker pushbutton 55 x 55 mm, white	EAN 4010312317495	10,20 €/pc.
WT55-rw	Rocker pushbutton 55 x 55 mm, pure white	EAN 4010312317501	10,20 €/pc.
WT55-wg	Rocker pushbutton 55 x 55 mm, pure white glossy	EAN 4010312317518	10,20 €/pc.
WT55-an	Rocker pushbutton 55 x 55 mm, anthracite	EAN 4010312317532	10,20 €/pc.



## W2T55-wg

NEW

Double rocker pushbutton, 2 NO contacts 10 A/250 V AC. Pushbutton for single mounting 80 x 80 mm external dimensions, internal frame dimensions 55 x 55mm, 15 mm high.

W2T55-wg	Rocker pushbutton 55 x 55 mm, pure white glossy	EAN 4010312320389	15,20 €/pc.
----------	---	-------------------	-------------



Wireless pushbutton with intermediate frame and rocker (without frame)



Wireless pushbutton with intermediate frame and double rocker (without frame)



Wireless pushbutton with intermediate frame and rocker (without frame)



Wireless pushbutton with intermediate frame and double rocker (without frame)



Wireless pushbutton with intermediate frame and rocker (without frame)



Wireless pushbutton with intermediate frame and double rocker (without frame)

## FT4BS-ws



Wireless 4-way pushbutton 45 x 45 mm Belgium, Schneider-white. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT4BS-ws	Wireless 4-way pushbutton 45x45mm Belgium, Schneider-white	EAN 4010312314203	45,80 €/pc.
----------	--	-------------------	-------------

7-21

## FT4B-



Wireless 4-way pushbutton 45 x 45 mm Belgium. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT4B-cr	Wireless 4-way pushbutton 45 x 45 mm Belgium, Niko cream	EAN 4010312312995	45,80 €/pc.
FT4B-na	Wireless 4-way pushbutton 45 x 45 mm Belgium, Nikoanthracite	EAN 4010312314180	45,80 €/pc.
FT4B-nw	Wireless 4-way pushbutton 45 x 45 mm Belgium, Nikowhite	EAN 4010312312902	45,80 €/pc.

## FT4BI-



Wireless 4-way pushbutton 45 x 45 mm Bticino. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT4BI-an	Wireless 4-way pushbutton 45 x 45 mm Bticino, anthracite	EAN 4010312319758	45,80 €/pc.
FT4BI-ww	Wireless 4-way pushbutton 45 x 45 mm Bticino, white	EAN 4010312319765	45,80 €/pc.



Wireless pushbutton with intermediate frame and rocker (without frame)



Wireless pushbutton with intermediate frame and double rocker (without frame)



Wireless pushbutton with intermediate frame and rocker (without frame)



Wireless pushbutton with intermediate frame and double rocker (without frame)



Wireless pushbutton with intermediate frame and rocker laser engraved (without frame)



Wireless pushbutton with intermediate frame and double rocker laser engraved (without frame)

Recommended retail prices excluding VAT.

## FT4BL-lw



Wireless 4-way pushbutton 45 x 45 mm Belgium, Legrand-white. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT4BL-lw	Wireless 4-way pushbutton 45x45mm Belgium, Legrand-white	EAN 4010312314197	45,80 €/pc.
----------	--	-------------------	-------------

## FT4CH-



Wireless 4-way pushbutton for internal frame dimensions 60 x 60 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker. Also for cover frames from ABB Normelec and Hager.

FT4CH-hg	Wireless pushbutton without battery or wire, without frame, light grey	EAN 4010312300985	45,80 €/pc.
FT4CH-sz	Wireless pushbutton without battery or wire, without frame, black	EAN 4010312300992	45,80 €/pc.
FT4CH-w	Wireless pushbutton without battery or wire, without frame, white	EAN 4010312300978	45,80 €/pc.

## FT4CH+2P-



Wireless 4-way pushbutton for internal frame dimensions 60 x 60 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker laser engraved. Also for cover frames from ABB Normelec and Hager.

FT4CH+2P-w	Wireless pushbutton without battery or wire, without frame, laser engraved, white	EAN 4010312312001	53,40 €/pc.
------------	---	-------------------	-------------

PASSIVE WIRELESS SENSORS 55 X 55 MM



Wireless pushbutton with rocker  
(without frame)



Wireless pushbutton with  
double rocker (without frame)



Wireless pushbutton with rocker  
(without frame)



Wireless pushbutton with double  
rocker (without frame)



Wireless pushbutton with rocker  
(without frame)



Wireless pushbutton with double  
rocker (without frame)

FT4S-ws



Wireless 4-way pushbutton 55 x 55 mm Sweden Eljo-white. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT4S-ws	Wireless pushbutton, Eljo-white	EAN 4010312303191	45,80 €/pc.
---------	---------------------------------	-------------------	-------------

7-23

FT55ES-wg



Wireless 4-way pushbutton 55 x 55 mm Exxact Sweden, pure white glossy. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT55ES-wg	Wireless pushbutton Exxact, pure white glossy	EAN 4010312314227	45,80 €/pc.
-----------	---	-------------------	-------------

FT55RS-alpine white




Wireless 4-way pushbutton 55 x 55 mm Sweden Jussi-white. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT55RS-alpine white	Wireless pushbutton, alpine white	EAN 4010312314210	45,80 €/pc.
---------------------	-----------------------------------	-------------------	-------------





Wireless pushbutton with rocker (without frame)



Wireless pushbutton with double rocker (without frame)



Wireless pushbutton with rocker (without frame)



Wireless pushbutton with double rocker (without frame)



Wireless pushbutton with rocker (without frame)



Wireless pushbutton with double rocker (without frame)

7-24

# FT55EL-ws



Wireless 4-way pushbutton 55 x 55 mm Finland Elko-white. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT55EL-ws	Wireless pushbutton Finland, Elko-white	EAN 4010312316658	45,80 €/pc.
-----------	---	-------------------	-------------

# FT55R-



Wireless 4-way pushbutton 55 x 55 mm for Busch Jäger Reflex and Duro cover frames. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT55R-white	Wireless pushbutton, white	EAN 4010312313985	45,80 €/pc.
FT55R-alpine white	Wireless pushbutton, alpine white	EAN 4010312313992	45,80 €/pc.

# FT55AH-



Wireless 4-way pushbutton 55 x 55 mm for Merten glass frames and Berker. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker.

FT55AH-al	Wireless pushbutton, coated/aluminium paint	EAN 4010312318683	52,30 €/pc.
FT55AH-ws	Wireless pushbutton, white	EAN 4010312318676	44,50 €/pc.
FT55AH-rw	Wireless pushbutton, pure white	EAN 4010312318690	44,50 €/pc.
FT55AH-wg	Wireless pushbutton, pure white glossy	EAN 4010312318713	44,50 €/pc.
FT55AH-an	Wireless pushbutton, anthracite	EAN 4010312318720	44,50 €/pc.



Wireless mini pushbutton  
with rocker



Wireless mini pushbutton  
with double rocker

## FMT55/2-



Wireless mini pushbutton, 55 x 55 mm external dimensions, 15 mm high, with rocker. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. Smart Home sensor.

<b>FMT55/2-rw</b>	Wireless mini pushbutton without battery or wire, with rocker, pure white	EAN 4010312312469	<b>39,40 €/pc.</b>
<b>FMT55/2-wg</b>	Wireless mini pushbutton without battery or wire, with rocker, pure white glossy	EAN 4010312312483	<b>39,40 €/pc.</b>

7-25

## FMT55/4-



Wireless mini pushbutton, 55 x 55 mm external dimensions, 15 mm high, with double rocker. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. Smart Home sensor.

<b>FMT55/4-rw</b>	Wireless mini pushbutton without battery or wire, with double rocker, pure white	EAN 4010312312544	<b>42,20 €/pc.</b>
<b>FMT55/4-wg</b>	Wireless mini pushbutton without battery or wire, with double rocker, pure white glossy	EAN 4010312312568	<b>42,20 €/pc.</b>



FMH8-al/anso

## FFD-al/anso

Wireless 50-way remote control with display 185 x 50 mm, 17 mm high. Power is supplied by lithium-ion battery whose voltage is monitored and shown in the display. With charger, wall holder WHF-al and 2 stainless-steel countersunk screws 2.9 x 25 mm and plugs 5 x 25 mm. Smart Home sensor.

FFD-al/anso	Wireless remote control with display and rechargeable battery. Painted aluminium top, bottom anthracite-soft paint. With wall holder and charger.	EAN 4010312313541	125,00 €/pc.
-------------	---	-------------------	--------------

## FF8-al/anso



Wireless 8-way remote control 185 x 50 mm, 17 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. With wall holder WHF-al and 2 stainless-steel countersunk screws 2.9 x 25 mm and plugs 5 x 25 mm. Smart Home sensor.

FF8-al/anso	Wireless remote control with 2 double rockers, painted aluminium top, bottom and rockers anthracite-soft paint	EAN 4010312303931	105,90 €/pc.
-------------	--	-------------------	--------------

## FMH8-



Wireless 8-way mini hand-held transmitter 45 x 85 mm, 18 mm high. Weighs only 60 grams. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.

FMH8-wg	Wireless mini hand-held transmitter pure white glossy, laser engraved 1+2+3+4+5+6+7+8	EAN 4010312321348	75,80 €/pc.
FMH8-ag	Wireless mini hand-held transmitter anthracite glossy, laser engraved 1+2+3+4+5+6+7+8	EAN 4010312321331	75,80 €/pc.
FMH8-al/anso	Wireless mini hand-held transmitter, the top is painted in aluminum and the bottom and the pushbuttons have an anthracite-soft paint, laser engraved 1+2+3+4+5+6+7+8	EAN 4010312313282	83,80 €/pc.



## FHS2-al/anso



Wireless 2-way hand-held transmitter with rocker aluminium/anthracite-soft, 49 x 47 mm, 16 mm high. Weighs only 37 grams. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.

FHS2-al/anso	Wireless hand-held transmitter without battery or wire, with rocker, aluminium/anthracite-soft	EAN 4010312320303	50,70 €/pc.
--------------	--	-------------------	-------------

7-27



## FHS4-al/anso



Wireless 4-way hand-held transmitter with rocker aluminium/anthracite-soft, 49 x 47 mm, 16 mm high. Weighs only 37 grams. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.

FHS4-al/anso	Wireless hand-held transmitter without battery or wire, with double rocker, aluminium/anthracite-soft	EAN 4010312320297	52,90 €/pc.
--------------	---	-------------------	-------------



## FKD-wg



**Wireless bell pushbutton 80 x 40 x 15 mm, pure white glossy with energy generator. Generates the energy for radio telegrams by pushing the button, therefore without connecting cable and no stand-by loss.**

Labeling field 43 x 12 mm. For example for Dymo label tape 9 mm and 12 mm. The radio bell pushbutton transmits 1 signal that can be evaluated like a 1-channel wireless pushbutton.

FKD-wg	Wireless and batteryless bell pushbutton, pure white glossy	EAN 4010312319475	43,10 €/pc.
--------	---	-------------------	-------------

## FSTAP-al/sz



**Wireless keyswitch for surface mounting 70 x 70 x 43 mm. Die cast aluminium, black front, protection degree IP44. Euro profile cylinder lock with 2 keys. Battery lifetime 3-5 years. No standby loss. Smart Home sensor.**

No external power supply required, so no connecting wire.

An internal 3 V CR2032 battery supplies power for several years.

To change the battery, open the housing as described in the installation instructions.

The lock has 2 positions, right and left with spring-supported return to the middle.

The wireless keyswitch transmits 2 evaluable signals that are taught into the wireless actuators.

FSTAP-al/sz	Wireless keyswitch, without wire, aluminium/black	EAN 4010312320907	95,80 €/pc.
-------------	---	-------------------	-------------

## FIW-USB

**Wireless infrared converter with USB port for the universal remote control Logitech Harmony Touch (available from specialist retailers). Only 0.05 watt standby loss. Smart Home sensor.**

With a special Eltako FIW data record, the infrared signals are converted into wireless telegrams by a wireless infrared converter FIW-USB and transmitted to the Eltako wireless network.

Either connect to a device with power supply to the USB socket or use a USB charger for mains voltage. USB plug Type A with 2 m connecting cable.

FIW-USB	Wireless infrared converter with USB port	EAN 4010312311158	93,50 €/pc.
---------	---	-------------------	-------------





## FTK-



Wireless window/door contact with solar cell 75 x 25 x 12 mm, pure white and anthracite. Adhesive foil mounting. Protection class IP54, therefore suitable for outdoor mounting. Smart Home sensor.

FTK-rw	Wireless window/door contact, pure white	EAN 4010312305010	72,80 €/pc.
FTK-an	Wireless window/door contact, anthracite	EAN 4010312305164	74,90 €/pc.

7-29



## FTKB-rw

Wireless window/door contact with solar cell and battery (lifetime 8 years) 75 x 25 x 12 mm, pure white. Adhesive foil mounting. Smart Home sensor.

FTKB-rw	Wireless window/door contact with battery, pure white	EAN 4010312316436	57,80 €/pc.
---------	---	-------------------	-------------



## FFG7B-rw

Wireless window handle sensor pure white, 120 x 35 x 7 mm, with battery (lifetime 7 years). Installation behind conventional window handle. Smart Home sensor.

Wireless transmit telegrams for window positions open, tilted and closed. Status telegram every 15 minutes. **Very simple installation under standard window handle: Unscrew handle, fit sensor, and screw handle back on.**

FFG7B-rw	Wireless window handle sensor, pure white	EAN 4010312318638	63,20 €/pc.
----------	---	-------------------	-------------



## FFKB-wg

NEW

**Wireless window/door contact pure white glossy, 75 x 25 x 12 mm, with battery (lifetime 7 years). Magnet pure white 37 x 10 x 6 mm. Smart Home sensor.**

On opening and closing, the related telegram is send twice in short succession. The current status telegram is sent cyclically every approx. 8 minutes. Attach by bonding.

The wireless sensor can be taught in the actuators listed below and in the Wireless Building Visualisation and Control Software: F2L14, F4HK14, FGM, FHK14, FHK61, FMZ14, FMZ61, FSB14, FSB61, FSB71, FSG14, FSR14, FSR61, FSR71, FTN14, FTN61, FUD14, FUD71, FUTH, FZK14, FZK61

FFKB-wg	Wireless window/door contact, pure white glossy	EAN 4010312321102	56,70 €/pc.
---------	---	-------------------	-------------



## FFTE-rw

Battery-free  
by EnOcean

**Wireless window touch contact with energy generator pure white, 48 x 32 x 11.5 mm. Also for monitoring of doors, drawers and other mobile equipment. Generates the power for wireless telegrams when the button is pressed. Therefore, no connecting wire and no standby losses. Smart Home sensor.**

A wireless telegram is sent when a window is opened or closed. Evaluated via FHK14, FHK61, FSB14, FSB61, FSB71, FSR14, FSR61, FSR71, FZK14, FZK61 and GFVS. Attach by affixing supplied adhesive foil, screwing on or using the supplied mounting bracket.

FFTE-rw	Wireless window/door contact, pure white	EAN 4010312319024	52,50 €/pc.
---------	--	-------------------	-------------



## FTKE-rw

Battery-free  
by EnOcean

**Wireless window/door contact with energy generator 48 x 32 x 11.5 mm, pure white. Also for monitoring of drawers and other mobile equipment. Generates the power for wireless telegrams itself when the lever is pressed, therefore there is no battery, no connecting wire and no standby loss. Fixing by gluing, screwing or with mounting brackets BW3. Smart Home sensor.**

FTKE-rw	Wireless window/door contact, pure white	EAN 4010312315231	52,50 €/pc.
---------	--	-------------------	-------------



FPE-1



Wireless position switch with energy generator 48 x 32 x 11.5 mm, blue. Generates the power for wireless telegrams itself when the lever is pressed, therefore there is no battery, no connecting wire and no standby loss.

**FPE-1:** When pressing the operating lever a wireless telegram Data (hex) 0x10 is sent and when releasing Data (hex) 0x00 is sent, like a wireless pushbutton.

FPE-1	Wireless position switch, blue	EAN 4010312315552	62,90 €/pc.
-------	--------------------------------	-------------------	-------------


7-31




FVST

The encryption for the wireless window-door contacts FTKE, the wireless position switch FPE-1 as well as the wireless flat pushbuttons FIFT and FIT can be activated and deactivated with the wireless encryption plug FVST.

**FTKE and FPE**  
**Activate encryption:**

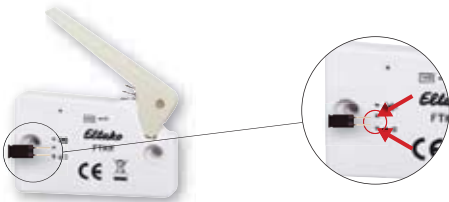


**FTKE and FPE**  
**Deactivate encryption:**

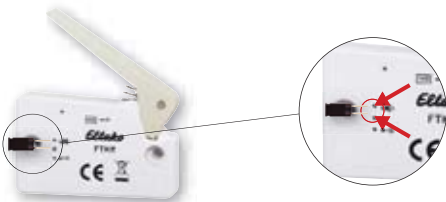


Insert the encryption plug and pull the lever.

**FIT55E, FIT65 and FIFT65**  
**Activate encryption:**

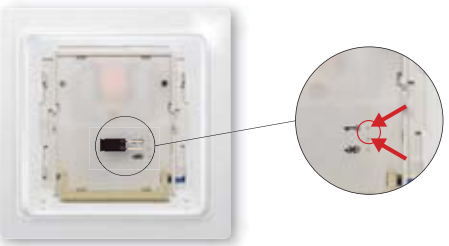

**FIT55E, FIT65 and FIFT65**  
**Deactivate encryption:**

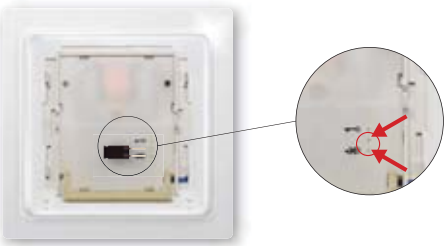

Insert the encryption plug and operate the rocker.

FVST	Wireless encryption plug	EAN 4010312907290	1,00 €/pc.
------	--------------------------	-------------------	------------





### BW3

Set mounting brackets for FTKE and FPE-1 with 3 brackets, screws, screw nuts and self-adhesive strips.

BW3	Mounting brackets, pure white	EAN 4010312907641	3,30 €/pc.
-----	-------------------------------	-------------------	------------



### FTKB-hg

Wireless window/door contact mTRONIC with battery (lifetime several years) 135 x 18 x 9 mm, light grey. With intelligent burglary detection in mode 1 and 2 (locking monitoring). An alarm signal is sent when the window is opened at the locked and tilted position. Fixing by screwing in the window frame, between frame and sash on PVC or wooden doors and windows, in accordance with the manual. Smart Home sensor.

FTKB-hg	Wireless window/door contact with battery, light grey	EAN 4010312318782	90,40 €/pc.
---------	---	-------------------	-------------



### FTKB-gr

Winkhaus wireless window/door contact with battery (lifetime several years) 128 x 24 x 9 mm, grey. Fixing by screwing in the window frame, between frame and sash on PVC or wooden doors and windows, in accordance with the manual. Smart Home sensor.

FTKB-gr	Wireless window/door contact with battery, grey	EAN 4010312317228	106,00 €/pc.
---------	---	-------------------	--------------



## FMH2-



**Wireless 2-way mini hand-held transmitter 43 x 43 mm, 16 mm high. Weighs only 30 grams. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.**

<b>FMH2-ws</b>	Wireless mini hand-held transmitter white, laser engraved 0 + I	EAN 4010312303450	<b>40,90 €/pc.</b>
<b>FMH2-rw</b>	Wireless mini hand-held transmitter pure white, laser engraved 0 + I	EAN 4010312303467	<b>40,90 €/pc.</b>
<b>FMH2-wg</b>	Wireless mini hand-held transmitter pure white glossy, laser engraved 0 + I	EAN 4010312303481	<b>40,90 €/pc.</b>
<b>FMH2-sz</b>	Wireless mini hand-held transmitter black, laser engraved 0 + I	EAN 4010312303474	<b>40,90 €/pc.</b>
<b>FMH2-an</b>	Wireless mini hand-held transmitter anthracite, laser engraved 0 + I	EAN 4010312303498	<b>40,90 €/pc.</b>

7-33



## FMH2S-



**Wireless 2-way mini hand-held transmitter 43 x 43 mm, 16 mm high. Weighs only 30 grams. Also prepared to attach a key fob. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.**

<b>FMH2S-ws</b>	Wireless mini hand-held transmitter white for key ring, laser engraved 0 + I	EAN 4010312303368	<b>43,30 €/pc.</b>
<b>FMH2S-rw</b>	Wireless mini hand-held transmitter pure white for key ring, laser engraved 0 + I	EAN 4010312303375	<b>43,30 €/pc.</b>
<b>FMH2S-wg</b>	Wireless mini hand-held transmitter pure white glossy for key ring, laser engraved 0 + I	EAN 4010312303399	<b>43,30 €/pc.</b>
<b>FMH2S-sz</b>	Wireless mini hand-held transmitter black for key ring, laser engraved 0 + I	EAN 4010312303382	<b>43,30 €/pc.</b>
<b>FMH2S-an</b>	Wireless mini hand-held transmitter anthracite for key ring, laser engraved 0 + I	EAN 4010312303405	<b>43,30 €/pc.</b>



## FMH4-



**Wireless 4-way mini hand-held transmitter 43 x 43 mm, 16 mm high. Weighs only 30 grams. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.**

<b>FMH4-ws</b>	Wireless mini hand-held transmitter white, laser engraved 1+2+3+4	EAN 4010312301029	<b>43,30 €/pc.</b>
<b>FMH4-rw</b>	Wireless mini hand-held transmitter pure white, laser engraved 1+2+3+4	EAN 4010312301036	<b>43,30 €/pc.</b>
<b>FMH4-wg</b>	Wireless mini hand-held transmitter pure white glossy, laser engraved 1+2+3+4	EAN 4010312301067	<b>43,30 €/pc.</b>
<b>FMH4-sz</b>	Wireless mini hand-held transmitter black, laser engraved 1+2+3+4	EAN 4010312301012	<b>43,30 €/pc.</b>
<b>FMH4-an</b>	Wireless mini hand-held transmitter anthracite, laser engraved 1+2+3+4	EAN 4010312301043	<b>43,30 €/pc.</b>



## FMH4S-



Wireless 4-way mini hand-held transmitter 43 x 43 mm, 16 mm high. Weighs only 30 grams. Also prepared to attach a key fob. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.

FMH4S-ws	Wireless mini hand-held transmitter white for key ring, laser engraved 1+2+3+4	EAN 4010312301371	45,60 €/pc.
FMH4S-rw	Wireless mini hand-held transmitter pure white for key ring, laser engraved 1+2+3+4	EAN 4010312301562	45,60 €/pc.
FMH4S-wg	Wireless mini hand-held transmitter pure white glossy for key ring, laser engraved 1+2+3+4	EAN 4010312301586	45,60 €/pc.
FMH4S-sz	Wireless mini hand-held transmitter black for key ring, laser engraved 1+2+3+4	EAN 4010312301555	45,60 €/pc.
FMH4S-an	Wireless mini hand-held transmitter anthracite for key ring, laser engraved 1+2+3+4	EAN 4010312301579	45,60 €/pc.



## FMH2S-wr



Wireless mini hand-held transmitter for calling systems 43 x 43 mm, 16 mm high. Weighs only 48 grams. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.

FMH2S-wr	Wireless mini hand-held transmitter with grey carry strap for calling systems, pure white with red lettering	EAN 4010312303337	51,90 €/pc.
----------	--	-------------------	-------------



## FMH1W-sz



Wireless mini hand-held transmitter waterproof 66 x 44 mm, 10-20 mm high. Weighs only 34 grams. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no battery. Smart Home sensor.

FMH1W-sz	Wireless mini hand-held transmitter, waterproof, black	EAN 4010312315293	64,70 €/pc.
----------	--	-------------------	-------------



FTTB

NEW

**Wireless pushbutton tracker with battery (lifetime 5-8 years). 55 x 44 mm, 15 mm high. Weighs only 20 grams. Smart Home sensor.**

The wireless pushbutton tracker FTTB has a blue pushbutton to send normal pushbutton telegrams. After opening the housing (grasp into the joint and prise apart), switch the tracker on by shifting the slide switch to the *T* position.  
The sensor then sends a presence telegram every 60 seconds.  
An internal 3V button cell CR2032 supplies power for several years.

FTTB	Wireless pushbutton tracker, without wire	EAN 4010312321119	58,20 €/pc.
------	---	-------------------	-------------

7-35



Flat pushbutton with rocker



Flat pushbutton with double rocker

FT4F-

Battery-free  
by EnOcean

**Wireless 4-way flat pushbutton, 80 x 80 mm external dimensions, internal frame dimensions 63 x 63 mm, 15 mm high. Generates the power for wireless telegrams itself when the button is pressed, therefore there is no connecting wire and no standby loss. With rocker and double rocker. Smart Home sensor.**

FT4F-al	Wireless flat pushbutton without battery or wire, coated/aluminium paint	EAN 4010312306697	48,80 €/pc.
FT4F-an	Wireless flat pushbutton without battery or wire, anthracite	EAN 4010312302996	41,00 €/pc.
FT4F-rw	Wireless flat pushbutton without battery or wire, pure white	EAN 4010312302941	41,00 €/pc.
FT4F-sz	Wireless flat pushbutton without battery or wire, black	EAN 4010312302965	41,00 €/pc.
FT4F-wg	Wireless flat pushbutton without battery or wire, pure white glossy	EAN 4010312302972	41,00 €/pc.
FT4F-ws	Wireless flat pushbutton without battery or wire, white	EAN 4010312302927	41,00 €/pc.